

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/099706 A1

(51) International Patent Classification⁷: F41J 2/02

(21) International Application Number:
PCT/SE2004/000615

(22) International Filing Date: 22 April 2004 (22.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0301360-4 9 May 2003 (09.05.2003) SE

(71) Applicant (for all designated States except US): SAAB AB
[SE/SE]; S-581 88 Linköping (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ANDREN, Robert
[SE/SE]; Edeskvärna 4, S-561 92 Huskvarna (SE). LARS-
SON, Ronnie [SE/SE]; 12525 Harney Drive, Orlando, FL
32828-8948 (US).

(74) Agent: SAAB AB; Corporate Technology, Margareta
Ydreskog, S-581 88 Linköping (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ.

[Continued on next page]

(54) Title: TARGET DEVICE

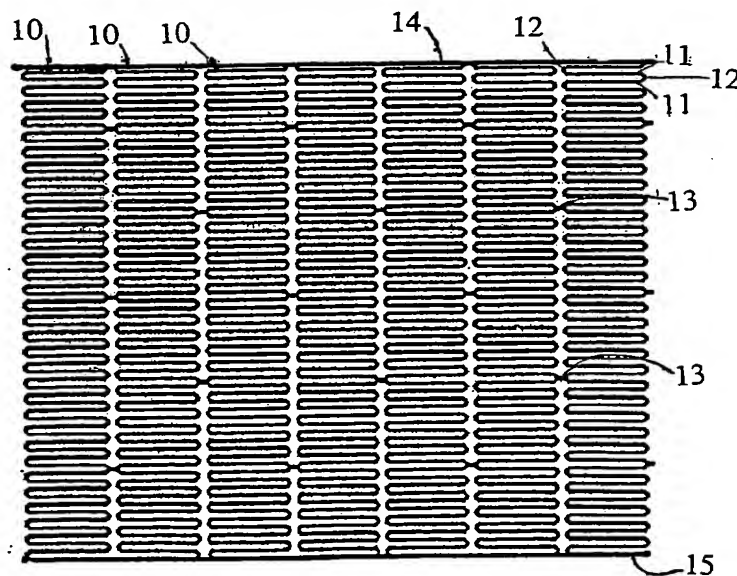

(57) Abstract: This invention comprises a target device for firing practice comprising at least one thermal target surface heated by an electrically current passing through same. The thermal target surface comprises a number of current coils (10) arranged so as to conduct the current from a first area (14) of the target surface to a second area (15). Each current coil (10) comprises current conductors (11) disposed essentially in parallel with one another at a first distance from one another. The current conductors (11) are connected to one another at their ends so that they form said current coil from the first area to the second area. Proximate current coils are mutually connected via bridges (13).



CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Target device

→ TECHNICAL AREA ✓

5 This invention concerns a target device for firing practice as per the preamble to claim 1.

→ STATE OF THE ART ✓

10 In firing practice and tactical exercises involving weapons equipped with thermal sights, target figures that exhibit as realistic a signature as possible are needed. As a result, target surfaces whose heat radiation properties are as similar to those of the actual targets as possible are sought after. The target surfaces may resemble, e.g. tank targets.

15

Known thermal targets constructed of modules comprise a foil of relatively high resistivity. To achieve the desired heat radiation, there is a need for a corresponding relatively high electrical voltage, which is undesirable from a safety standpoint. The modules can alternatively be equipped with a low-resistivity foil such as aluminum

20 foil, and electrical current is applied at low voltage and high amperage. However, this design requires that a transformer be disposed at the target, and that extremely robust electrical wires connect the transformer to the modules, with the disadvantages entailed thereby.

25 SE 465 795 describes a known target device for firing practice with live ammunition. The target device is heated by an electrical current of moderate voltage and amperage. It is intended to withstand hits by live ammunition without its thermal properties being notably affected. The target device comprises a thermal target surface heated by an electrical current passing through same. The thermal target

30 surface of the target device comprises a thin metal layer divided into two sections with relatively large current cross-sections to conduct electrical current back and forth. Between these two sections there is a third section with a relatively small current cross-section. The third section comprises a large number of current paths of

a first type having high resistance that are disposed transversely to the prevailing direction of electrical current flow.

When a relatively large area of penetration is created in this target device, it has however been shown that electrical conductivity and consequently heat radiation is entirely or partly eliminated around the area of penetration. The heat radiation from the target device thus no longer resembles the radiation from a real target.

10 DESCRIPTION OF THE INVENTION

One object of the present invention is to prolong the service life of the aforescribed target devices by constructing them so that their thermal properties are affected less by hits from live ammunition.

15 This has been achieved by means of a target device for firing practice comprising at least one thermal target surface heated by an electrical current passing through same, wherein the thermal target surface comprises a number of current coils arranged so as to conduct the current from a first area of the target surface to a second area. The current coils are made of aluminum or some other electrically conductive metal and
20 are preferably disposed in parallel in relation to one another. Each current coil contains current conductors disposed essentially in parallel with one another at a first distance from one another, which current conductors are connected with one another at their ends so that they form said current coil from the first area to the second area. Proximate current coils are mutually connected with one another via bridges. The
25 bridges are preferably arranged at a second distance from one another that is greater than the first distance. For example, the second distance is five to ten times greater than the first distance, e.g. roughly 20 times greater.

According to a first variant, the thermal target surface comprises a first substrate on
30 which the current coils are disposed. The substrate thus functions like a circuit board laminate. The substrate has high temperature resistance and is made of, e.g. polyester. A protective plastic film can also be disposed on the first substrate so that it covers the current coils. An insulating layer of foam rubber or some other heat-insulating material can be disposed on the surface of the first substrate facing the

current coils, which insulating layer insulates the target surface from the underlying material. The function of the insulating layer is thus to prevent heat from being abducted, and to minimize energy losses. The current coils are closed in that current is conducted from the second area to the first. For example, at least one return conductor is disposed between the second and the first area, e.g. connected to one of the edges of the thermal surface, in order to conduct the current back.

According to another variant, the target device comprises, in addition to the first substrate and any plastic film, a return conductor that essentially covers the surface of the first substrate facing the current coils. With the return conductor realized in this way, it becomes extremely unsusceptible to breaks. In order for the current through the return conductor to be interrupted, essentially the entire width of the thermal surface must be penetrated and/or worn/split. The return conductor is made of aluminum or some other conductive metal. In addition, to further strengthen the target surface, the return-conducting surface can be disposed in contact with a second substrate made of, e.g. the same material as the first substrate. An insulating layer of foam rubber or some other heat-insulating material can be disposed on the surface of the second substrate facing the surface of the return-conducting surface.

The target device according to the invention withstands penetration without notable degradation of its heat-generating capacity, while at the same time also withstanding splitting effects, which normally occur in connection with penetration by high-velocity projectiles. When damage (projectile penetration, tearing, etc.) to the thermal target surface takes place, only local heating occurs around the actual damage. The target device is also simple and inexpensive to produce. According to the second embodiment, in which the target surface comprises a return conductor and a second substrate belonging to the return conductor, the target surface exhibits additional resistance to splitting.

BRIEF DESCRIPTION OF THE FIGURES

The invention will be described in greater detail below with the help of exemplary embodiments, and with reference to the accompanying drawing. The figures show the following:

Fig. 1 shows a heating mat for a thermal target device according to a first embodiment of the invention,

Fig. 2 shows a heating mat for a thermal target device according to a second embodiment of the invention, and

5 Fig. 3 shows a conduction pattern for a heating mat according to either of the two embodiments.

DESCRIPTION OF EMBODIMENTS

10 Fig. 1 shows a heating mat 1 for a thermal target device, a circuit layer 2 consisting of a pattern of aluminum pathways etched onto a substrate layer 3 of polyester. The circuit layer 2, which will be described in greater detail below, is arranged so as to conduct current, whereupon heat is generated. On top of the circuit layer 2 there is disposed a layer 4 of a plastic film, which stabilizes and protects the aluminum
15 circuit. The plastic film can be dulled to reduce reflections from its surface. The plastic film is made of, e.g. polyethylene or polyester. A layer 5 of heat-insulating material is disposed on the side of the substrate layer 3 facing the circuit layer 2 in order to prevent heat from radiating out from the rear of the mat. The heat-insulating material is made of, e.g. foam rubber. The circuit layer 2 is electrically connected by means of one or more return conductors (not shown) at one edge of the mat by means
20 of, e.g. connectors (not shown). At an opposite edge of the mat there is a current connector (not shown) for connecting a voltage source, characteristically 12V or 24V. The return conductor(s) is/are then arranged so as to conduct the current between the aforementioned opposite edges of the mat.

25

Fig. 2 shows an alternative heating mat 6 for a thermal target device, the aforementioned circuit layer 2 consisting of a pattern of aluminum pathways etched on a first substrate layer 7 of polyester. On top of the circuit layer 2 there is disposed the aforescribed plastic film layer 4. An electrically conductive layer 8 that
30 functions as a return conductor for the current through the circuit layer 2 is disposed on the side of substrate layer 7 facing the circuit layer 2. The return conductor layer 8 consists of a layer of conductive metal, such as aluminum, that covers essentially the entire substrate surface 7. The return conductor is, on its side facing the first substrate 7, etched on a second substrate layer 9 made of, e.g. polyester. The layer 5

of insulating material described in conjunction with Fig. 1 is disposed behind the second substrate layer. The circuit layer 2 and return conductor layer 8 are electrically connected via, e.g. connectors (not shown) at one edge of the mat, while a current connector (not shown) for connecting to a voltage source, characteristically 12V or 24V, is present at the opposite edge of the mat.

By virtue of the double substrate layers 7,9, the alternative heating mat described in conjunction with Fig. 2 exhibits increased tear resistance compared to the heating mat 1 described in conjunction with Fig. 1, as a result of which the tendency to split and tear is reduced when high-velocity projectiles strike the heating mat.

Consequently, the heating mat described in conjunction with Fig. 2 is particularly suitable for use in tank applications, while the heating mat described in conjunction with Fig. 1 is fully sufficient for infantry applications.

In Fig. 3, the circuit layer pattern 2 consists of a number of current coils 10 that are arranged in parallel and conduct the current from the edge 14 of the mat that is connected to the voltage source to its opposite edge 15. The current coils 10 are connected at the opposite edge to the return conductor, which in turn connects to the negative pole of the voltage source. For example, the mats 1, 6 comprise approximately 30 parallel current coils 10 per meter of mat. Each current coil 10 comprises conducting elements 11 disposed at a distance from one another and having edges 14, 15. In the foregoing example, the lengths of the conducting elements are approximately 30 mm or somewhat shorter. The distance between the parallel conducting elements 11 is 1 - 3 mm, e.g. 2 mm. The conducting elements 11 are connected to one another at their ends by means of connectors 12 so that they form the current coil 10, which conducts the current from the power-supplied edge 14 to the opposite edge 15. Proximate current coils are also mutually connected with one another via bridges 13. The bridges 13 between twin adjacent current coils 10 are, e.g. realized every 40 mm.

The resistance values for the coils in the circuit layer pattern are chosen based on the desired output, the size of the surface is to be heated, and the applied voltage. A suitable output can fall within the range of 125 - 500 W/m², e.g. 250 W/m². All the

6

coils in the circuit layer pattern preferably have the same dimensions, and thus the same resistance value per unit of length.

CLAIMS

1. A target device for firing practice comprising at least one thermal target surface (1; 6) heated by an electrical current passing through same, wherein the thermal target surface comprises a plurality of current coils (10), each of which is arranged so as to conduct the current from a first area (14) of the target surface to a second area (15), characterized in that
 - the current coils (10) are made of an electrically conductive metal and have a predetermined resistance,
 - each current coil (10) comprises a plurality of current conductors (11) disposed at a first distance apart from one another and arranged symmetrically transverse to an axis representing the prevailing direction of current flow for the respective current coil (10), which current conductors (11) are connected at their ends to one another by means of connectors (12) so that they form said current coil from the first area (14) to the second area (15), and in that
 - proximate current coils are mutually connected via bridges (13).
2. A target device according to claim 1, characterized in that the current coils (10) are disposed in parallel in relation to one another.
3. A target device according to claim 1, characterized in that the bridges (13) are arranged at a distance from one another that is greater than the first distance.
4. A target device according to claim 3, characterized in that the second distance is 5 to 30 times greater than the first distance.
5. A target device according to claim 4, characterized in that the second distance is approximately 20 times greater than the first distance.
6. A target device according to claim 1, characterized in that the thermal target surface (1; 6) comprises a first substrate (3; 7) on which the current coils (10) are disposed.

7. A target device according to claim 6, characterized in that a plastic film (4) is disposed on the first substrate so that it covers the current coils (10).
- 5 8. A target device according to claim 6, characterized in that an insulating layer (5) is disposed on the surface of the first substrate (3) facing the current coils (10).
- 10 9. A target device according to claim 6, characterized in that a return-conducting layer (8) essentially covers the surface of the first substrate (7) facing the current coils.
10. A target device according to claim 9, characterized in that a second substrate (9) contacts the return-conducting layer (8).
- 15 11. A target device according to claim 10, characterized in that an insulating layer (5) is disposed on the surface of the second substrate (9) facing the return-conducting layer (8).
- 20 12. A target device according to claim 6 or 10, characterized in that the substrate(s) is/are made of polyester.
13. A target device according to claim 8 or 11, characterized in that the insulating layer (5) contains foam rubber.
- 25 14. A target device according to claim 1, characterized in that current coils (10) and bridges (13) are made of aluminum.
15. A target device according to claim 9, characterized in that the return-conducting layer (8) is made essentially of aluminum.

Fig 1

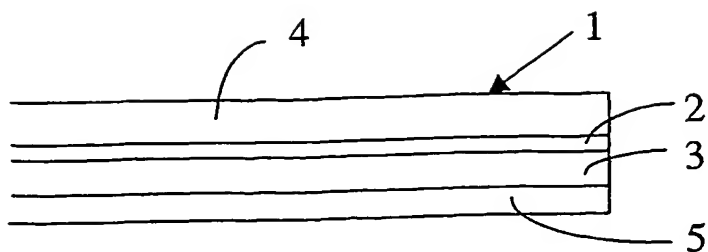


Fig 2


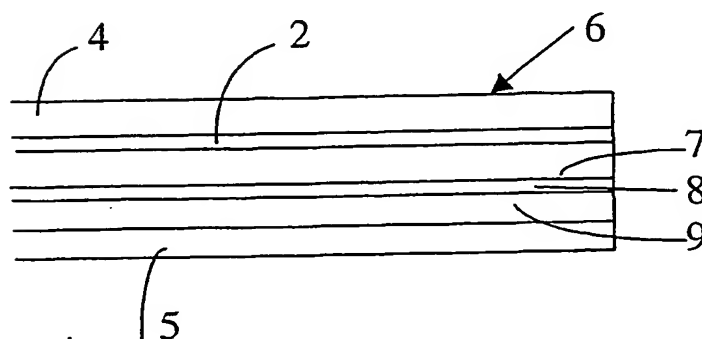


Fig 3

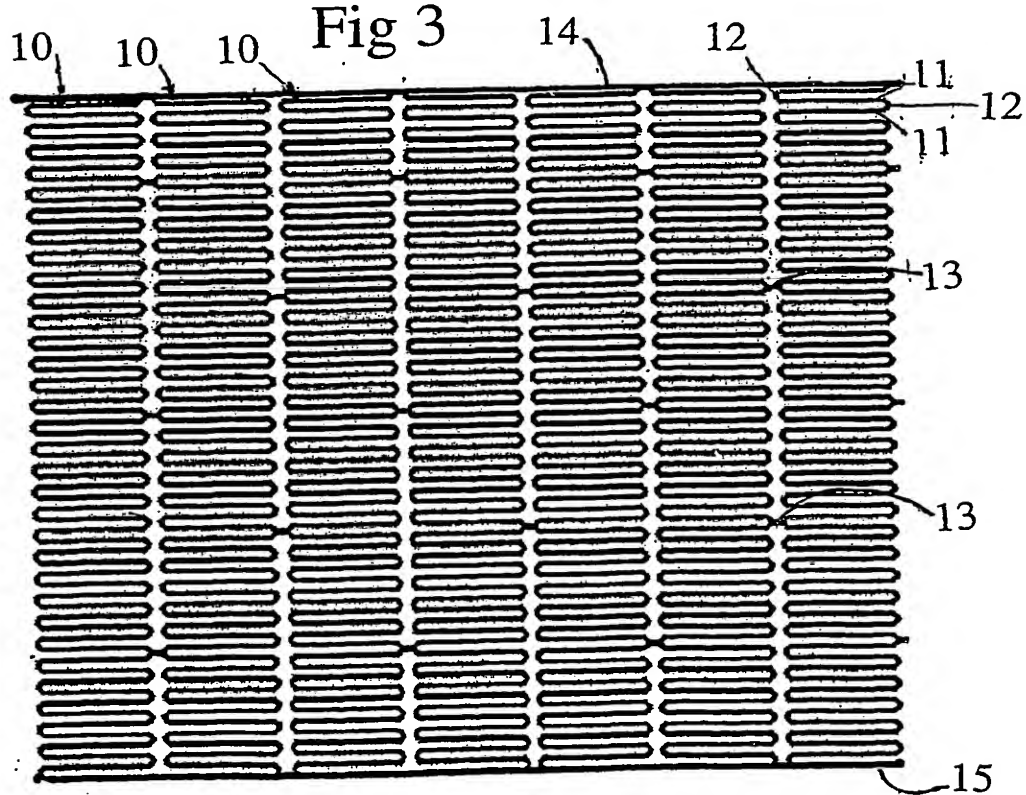

1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000615

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F41J 2/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SE 465795 B (SAAB TRAINING SYSTEMS AB), 28 October 1991 (28.10.1991) --	1-15
A	EP 0156070 A2 (TVI ENERGY CORPORATION), 2 October 1985 (02.10.1985) --	1-15
A	EP 0218372 A1 (BRITISH AEROSPACE PUBLIC LIMITED COMPANY), 15 April 1987 (15.04.1987) --	1-15
A	US 5065032 A (P.L. PROSSER), 12 November 1991 (12.11.1991) --	1-15

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 August 2004

Date of mailing of the international search report

04 -08- 2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Åke Olofsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000615

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4405132 A (C. THALMANN), 20 Sept 1983 (20.09.1983) -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/07/2004

International application No.

PCT/SE 2004/000615

SE	465795	B	28/10/1991	SE	9000882	A	14/09/1991
EP	0156070	A2	02/10/1985	AU	3582984	A	13/06/1985
				US	4546983	A	15/10/1985
EP	0218372	A1	15/04/1987	SE	0218372	T3	
				AT	59482	T	15/01/1991
				DE	3676618	D	00/00/0000
				GB	8521931	D	00/00/0000
				US	4769527	A	06/09/1988
US	5065032	A	12/11/1991	NONE			
US	4405132	A	20/09/1983	CH	649378	A	15/05/1985